

JOYTHCKH85 W

JOY CARE Electric Shower Range

Joy Care Kit Handle Dial 8.5kW Electric Shower White



Features:

- 15mm push-fit inlet connection
- Available in 8.5kW and 9.5kW power ratings @240V
- Draws water directly from mains supply, at working pressures between 0.5 bar and 10 bar
- Comfortable, safe showering; the thermostatic feature avoids temperature changes when water is used elsewhere in your home
- Audible clicks and bleeps denote setting changes, raised markings and larger fonts for ease of use

Product Certifications:



WRAS Cert. Number: 15050227
WRAS Expiry Date: 31/05/2020



RNIB

Tried and Tested



Intertek


For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--------------------------------|--------------------------------|
| Finish/Colour: | White |
| Main Construction Material: | ABS Plastic |
| No of Controls: | 2 |
| Control Type: | Push Button & Dial |
| Shower Type: | Electric Shower |
| Shower Head Type: | Multi-Function Handset |
| Working Pressure Range: (bar) | Min 0.5 Bar, Max 10 Bar |
| Maximum Static Pressure: (bar) | 10 |
| Plumbing System Suitability: | Mains Cold Feed Only |
| Connection Inlet: | 15mm Push-Fit Connection |
| Connection Outlet: | G 1/2" |
| Thermostatic: | Pre-Set to BEAB Care Standards |
| Isolation Valve Included: | No |
| Check Valve Included: | No |
| Power Rating: | 8.5kW (standard) |
| Phased Shutdown Feature: | Yes |
| Energy Rating: | A |

Dimensions (measurements in mm)

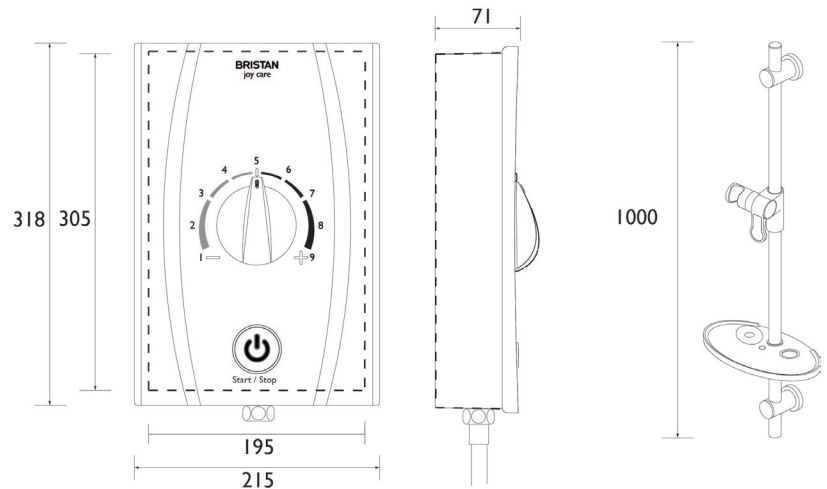

Flow Rates (l/min)

| | |
|-----------|-------|
| Power | 8.5kW |
| Flow Rate | 4.5 |

Quoted as per European Water Label (EWL) scheme conditions:
Output - 42°C, Input - 15°C, Voltage - 240V

TECHNICAL DATA SHEET



BRISTAN

D9